


# Line Protector 48

## D-PK-LNPRO-12004



The Line Protector 48 accepts up to 24 pairs of wires on its front panel.

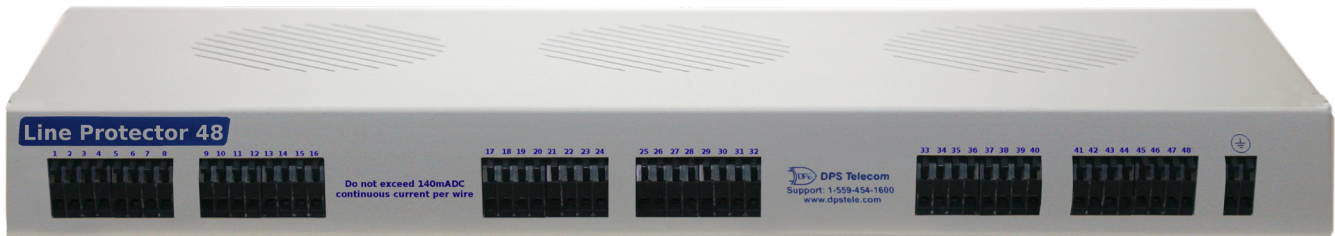

All wiring on the front panel exits electrically protected from the back panel.

## Overview

If you have remote sites on mountaintops or other lightning-prone locations, you know how expensive the damage can be.

Any time that copper leaves your building, you're potentially vulnerable. This includes copper routed through unprotected equipment.

This simple device adds protection for up to 24 pairs.

### Benefits of the Line Protector 48

- **SELF-RESETTING SURGE PROTECTION FOR 48 LINES.**
- **RACK-MOUNTED FOR CLEAN INSTALLATION.**
- **POWDER-COATED FOR DURABILITY.**
- **VERY EASY TO INSTALL AND USE WITH SPRING-CLAMP TERMINATION (NO TOOLS REQUIRED) AND NO SOFTWARE OR FIRMWARE TO CONFIGURE.**

## Features

D-PK-LNPRO-12004 Specs	
Power Requirements	Unpowered Device
Installation Type	Wiring Only
Operating Temp	-20° to 70°C
Storage Temp	-40° to 85°C
Max Surge (I=)	10KA @ 8/20 uSec
Let Through (V=)	90v @ 100v/sec (DC), 300v @ 100v/uSec (impulse)
Frequency Response	1MHZ LPF
Case Type	Aluminum Powder-coated
Orientation	Connectors on front and back panels
Wire Termination	Spring-clamp
Wire Gauge Range	14-28 AWG
Mounting Style	Rack mount
MTBF	15 Years

 **Call 1-800-622-3314 for Pricing**

Visit our website at [www.dpstele.com](http://www.dpstele.com)

4955 East Yale Avenue, Fresno, California 93727 • 800-622-3314 • Fax 559-454-1688